

MSR Gold™ SA Double Ended



MSR Gold™ 1200 SA/DE 1CT

To optimize the total lifetime of the double ended MSR Gold™ SA Double Ended lamps, the caps are plated with gold. This provides superior heat protection and thereby minimizes premature failure of the lamp and lamp holder, as well as ensuring extended consistent performance. In addition, the highly innovative P3 technology, developed by Philips, allows the lamp to be used at higher temperatures, which further extends service life and consistency of high-quality light output.

Product data

• General Characteristics

System Description	SA/DE
Cap-Base	SFC10-4
Cap-Base Information	SFC10-4
Execution	-
Operating Position	any
Main Application	Entertainment
Life to 50% failures	750 hr
EM	
Non-household	For professional use only-not for domestic use
Symbol	

• Light Technical Characteristics

Color Code	-
Color Rendering Index	85 Ra8
Color Temperature	6000 K
Color Temperature Technical	6000 K
Chromaticity Coordinate X	326 -
Chromaticity Coordinate Y	332 -
Luminous Flux Lamp EM	98000 (min), 106000 (nom) Lm
Luminous Efficacy Lamp EM	91 Lm/W

• Electrical Characteristics

Lamp Wattage	1200 W
Lamp Wattage Technical	1200 W

Lamp Current	13.6 A
Ignition Supply Voltage	198 (min) V
Dimmable	No

• Luminaire Design Requirements

• Product Dimensions

Base Face to Base Face A	114.4 (min), 114.8 (nom), 115.2 (max) mm
Overall Length C	136 (max) mm
Diameter D	22 (max) mm
Arc Length O	7.0 mm

• Product Data

Order code	928099605115
Full product code	928099605115
Full product name	MSR Gold™ 1200 SA/DE 1CT
Order product name	MSR Gold 1200 SA/DE 1CT/4
Pieces per pack	1
Packing configuration	4
Packs per outerbox	4
Bar code on pack - EAN1	8718291221210
Bar code on outerbox - EAN3	8718291221227
Logistic code(s) - 12NC	928099605115
Net weight per piece	0.034 kg

PHILIPS


MSR Gold™ SA Double Ended

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and


remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Dimensional drawing

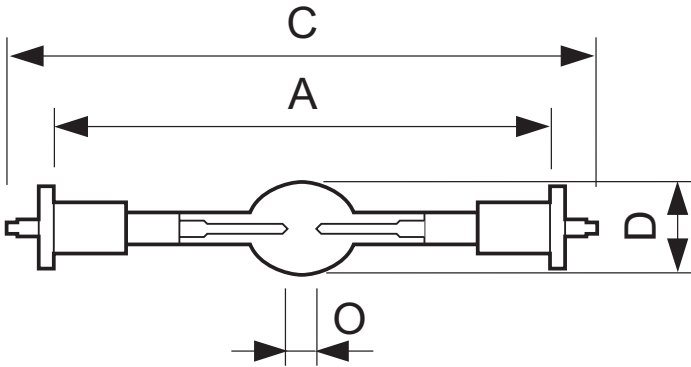


MSR Gold™ 1200 SA/DE 1CT

Product	A (Min)	A (Norm)	A (Max)	C (Max)	D (Max)	D1 (Norm)	F (Min)	F (Norm)	F (Max)	L (Min)	L (Norm)	L (Max)	O (Norm)
MSR GOLD 1200 SA/DE	114.4	114.8	115.2	136	22	-	-	-	-	-	-	-	7.0




SFC10-4

Photometric data

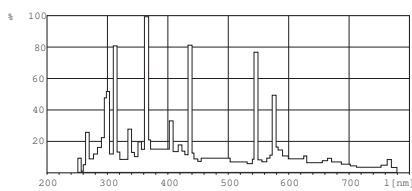

MSR Gold™ 1200 SA/DE, MSR Gold™ 1510 SA/DE

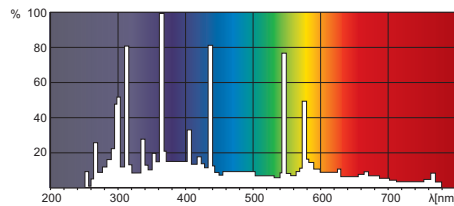

MSR Gold™ 1200 SA/DE, MSR Gold™ 1510 SA/DE



© 2015 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, September 27
data subject to change