

# DRIVER

## ND2530-T3

Professional High Frequency Transducer

PART NUMBER **15120011**

### Features

- 3-inch Diaphragm, 1.4-inch Exit Throat/ Pure Titanium Compression Driver
- 180 watt Continuous program power handling
- Frequency range: 500Hz - 20kHz
- Direct Drive™ Voice Coil Assembly
- 3-slot, optimized geometry phase plug
- Aluminum rear cover featuring an advanced vented fin heat dissipation design
- Copper inductance ring for extended response
- Vented, damped, low distortion, variable profile suspension System


The ND2530T3 is a high performance 2.5-inch diaphragm compression driver with a 1.4 inch exit throat featuring several state of the art technologies. The diaphragm and suspension are precision formed from .05 mm thick pure titanium. Perfect driver for professional high performance applications, from high power 2-way systems to multiple-way long throw systems and medium to large format line arrays. Very flexible and easy to crossover, offer the clarity of the 1" and the efficiency and power handling of a large format compression driver. Very good linearity and efficiency in combination with RCF HF94 and HF64 horns.

### General Specifications

Exit Throat Diameter	35.5/1.4	mm/inch
Rated Impedance	8	ohm
Power handling capacity <sup>1</sup>		
continuous program above 1.2 kHz	180	Watt
AES above 1.0 kHz	90	Watt
Sensitivity 1 W, 1 M, on axis, on horn <sup>2</sup>	110	dB
Frequency Range	700 - 20000	Hz
Diaphragm Material	Pure Titanium	
Suspension Material	Pure Titanium	
Suspension Design	Progressive	
Minimum Impedance	7.9 ohm at 3500 Hz	
Voice Coil Diameter	63.7/2.5	mm/inch
Voice Coil Material	Edgewound Aluminium	
Voice Coil Former Design	Direct drive - Nomex	
Number of layers	1 - Outside	
BL Factor	10.4	T · m
Flux Density	2	T
Phase Plug Design	3 slot	
Phase Plug Material	Aluminium	
Magnetics	Neodymium	
Voice Coil Demodulation	Copper ring	

### Mounting Information

Overall Diameter	123/4.8	mm/inch
Overall Height	69.5/2.7	mm/inch
Mounting		
4 x 6 mm threaded holes at 90 deg.	101.6/4.0	mm/inch
Net Weight	2.1/4.6	kg/Lbs
Shipping Weight	2.3/5.1	kg/Lbs

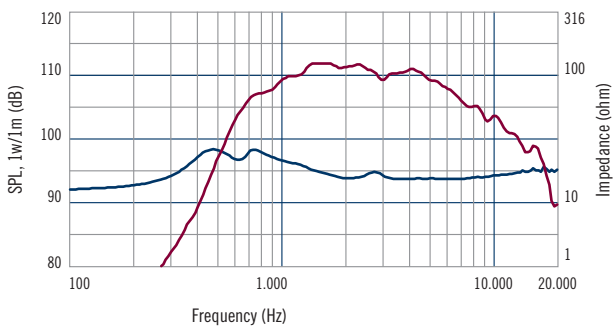

Frequency response and electrical impedance curve of the compression driver mounted on HF64 horn with input signal of 2.83 Volt.

