

Features:

- Plastic exponential horn.
- Compact size, flat front.
- 25 mm (1") throat.
- 45° x 45° nominal coverage.
- Stage monitors, side-fill and P.A. applications.

SPECIFICATIONS

| | |
|--|------------------|
| Nominal coverage | |
| Horizontal | 45 degrees |
| Vertical | 45 degrees |
| Directivity | |
| Directivity factor (Q) | 21 |
| Directivity index (Di) | 13 dB |
| Sensitivity | |
| On driver, 1W @ 1m, on axis ¹ | 108 dB SPL |
| Frequency response @ -10 dB ² | 800 to 18,000 Hz |
| Throat diameter | 25 (1) mm (in) |
| Minimum recommended crossover ³ | 600 Hz |

¹ Measured with D210Ti driver, 1,200 - 5,000 Hz average.

² Measured with D210Ti driver.

³ With D210Ti driver.

ADDITIONAL INFORMATION


| | |
|-------------------------------------|---|
| Horn material | PP plastic |
| Horn finish | Black/Silver/Onix |
| Overall dimensions | |
| Mouth height | 156 (6.14) mm (in) |
| Mouth width | 156 (6.14) mm (in) |
| Length | 258 (10.16) mm (in) |
| Volume displaced by horn | 1,1 (0.04) l (ft ³) |
| Net weight | 210 (0.46) g (lb) |
| Gross weight | 360 (0.79) g (lb) |
| Carton dimensions (W x D x H) | 16 x 16 x 28 (6.3 x 6.3 x 11.0) cm (in) |

MOUNTING INFORMATION


Mechanical connection of driver

Baffle cutout diameter (front mount)

HORN x DRIVER CONNECTION

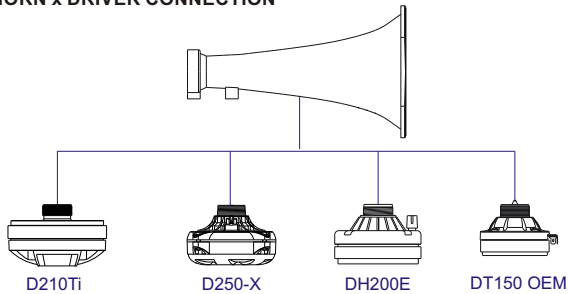

RESPONSE AND IMPEDANCE CURVES W/ D210Ti DRIVER INSIDE AN ANECHOIC CHAMBER, 1 W / 1 m

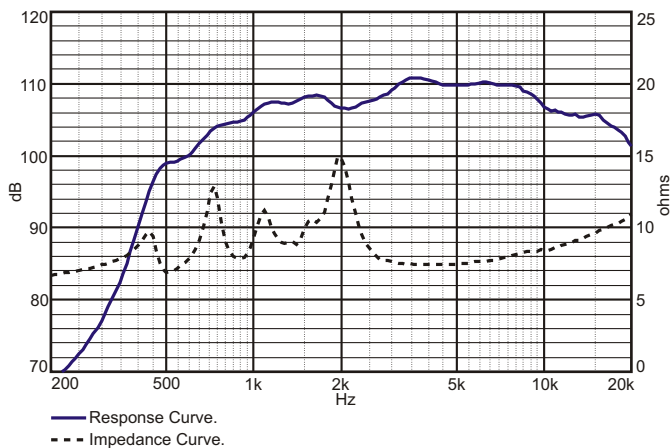

HL 14-25 BLACK




HL 14-25 SILVER




HL 14-25 ONIX

POLAR RESPONSE CURVES

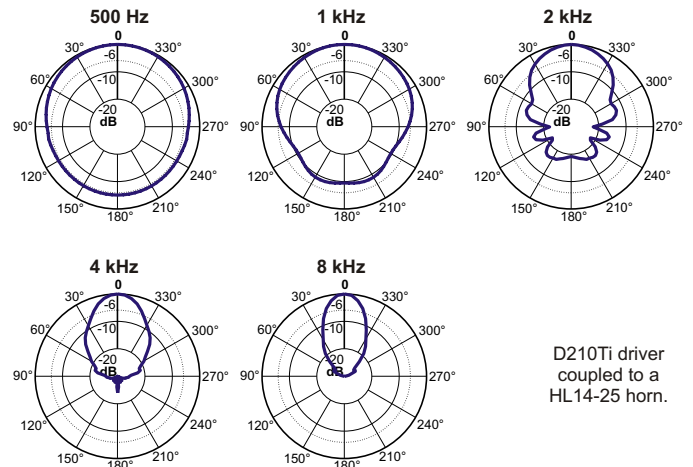

D210Ti driver coupled to a HL14-25 horn.

— Polar Response Curve.

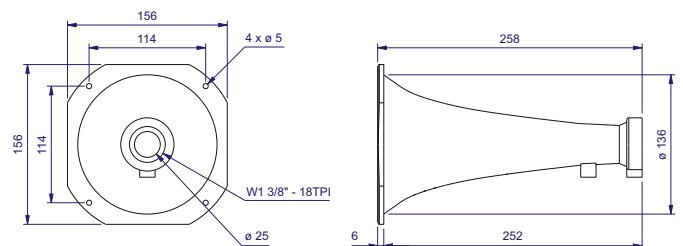

Dimensions in mm.

Specifications subject to change without prior notice.

Cod.: NA Rev.: 00 - 11/05

ELETRÔNICA SELENIUM S.A.
 BR 386 Km 435 - Nova Santa Rita/RS - Brasil -
 CEP 92480-000
 Tel.: 51. 3479 4000 Fax: 51. 3479 1150
 www.selenium.com.br
 Atendimento Técnico: 0800 514161

SELENIUM USA / SELENIUM EUROPE
 www.seleniumloudspeakers.com
 Toll Free: 1800 5620510