

Features:

- Plastic exponential horn.
- Compact size, flat front.
- 25 mm (1") throat.
- 60° x 60° nominal coverage.
- Stage monitors, side-fill and P.A. applications.




SPECIFICATIONS

Nominal coverage		
Horizontal	60	degrees
Vertical	60	degrees
Directivity		
Directivity factor (Q)	12	
Directivity index (Di)	11	dB
Sensitivity		
On driver, 1W @ 1m, on axis ¹	108	dB SPL
Frequency response @ -6 dB ²	1,500 to 15,000	Hz
Throat diameter	25 (1)	mm (in)
Minimum recommended crossover ³	1,200	Hz

¹ Measured with DT150 OEM driver, 2,000 - 8,000 Hz average.

² Measured with DT150 OEM driver.

³ With DT150 OEM driver.

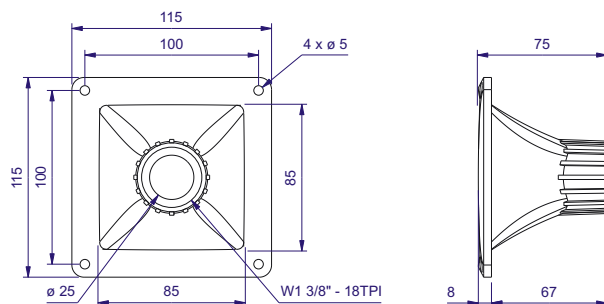

Dimensions in mm.

ADDITIONAL INFORMATION

Horn material	ABS plastic
Horn finish	Black
Overall dimensions	
Mouth height	115 (4.53) mm (in)
Mouth width	115 (4.53) mm (in)
Length	75 (2.95) mm (in)
Volume displaced by horn	0.2 (0.007) l (ft ³)
Net weight (1 piece)	100 (0.22) g (lb)
Gross weight (12 pieces per carton)	1,660 (3.66) g (lb)
Carton dimensions (W x D x H)	36 x 23 x 13 (14.2 x 9.1 x 5.1) cm (in)

MOUNTING INFORMATION

Mechanical connection of driver	Screw-on 1 3/8" - 18 TPI
Baffle cutout dimensions (front mount)	
Horizontal	85 (3.35) mm (in)
Vertical	85 (3.35) mm (in)


HORN DRIVER CONNECTION

DT150 OEM


D250-X

DH200E


D210Ti

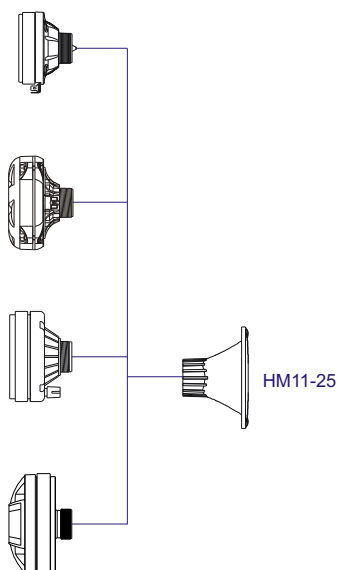

RESPONSE AND IMPEDANCE CURVES W/ DT150 OEM DRIVER INSIDE AN ANECHOIC CHAMBER, 1 W / 1 m

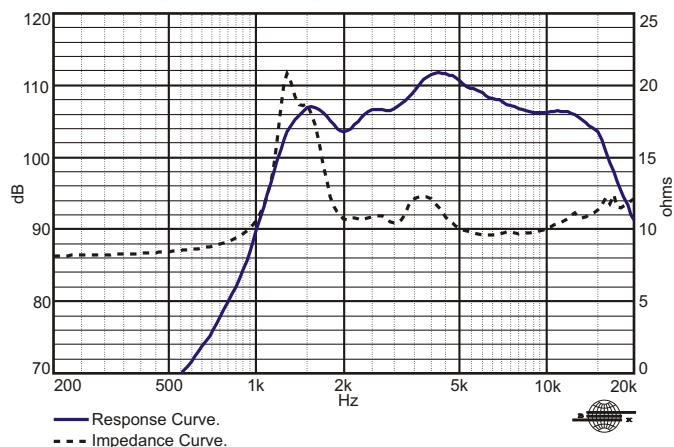

POLAR RESPONSE CURVE

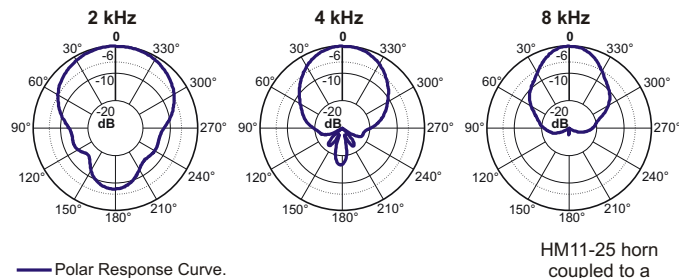

HM11-25 horn coupled to a DT150 OEM driver

Specifications subject to change without prior notice.

Cod.: 151514 Rev.: 03- 03/05

ELETRÔNICA SELENIUM S.A.
BR 386 Km 435 - Nova Santa Rita/RS - Brasil - CEP 92480-000
Tel.: 51. 479 4000 Fax: 51. 479 1150
www.selenium.com.br
Atendimento Técnico: 0800 514161

FILIAL SÃO PAULO
Rua Aquinos, 157 - São Paulo/SP - Brasil - CEP 05036-070
PABX.: 11.2126 6300 Fax: 11.2126 6360

SELENIUM USA / SELENIUM EUROPE
www.seleniumloudspeakers.com
Toll Free: 1800 5620510