

EXALITE


EXL Par 25° RGBWA 270W



CE RoHS

Notice: because the policy of improve the products quality of our company. Maybe some data in the instructions will change in future. By that time, we won't inform you about the changed matters. Our reserve the right of changing correlative specification when improve the products. Publisher of the instruction will not responsible for veracity of information and some correlative results caused by this information.

1.The Introduction of LED display panel:

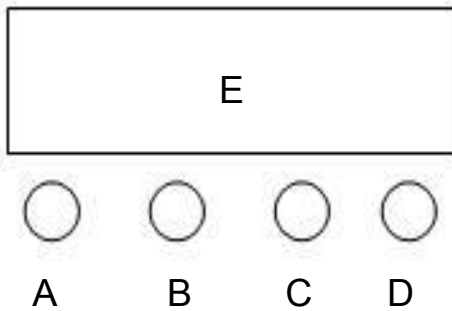

- A.Menu
- B. Up
- C. Down
- D.Enter
- E.LED display

Operation instruction: press “menu” to choose different effects, press “up” or “down” to set the function , press “enter” to save.

2. LED Menu:

No.	Menu	Description
1	d001	9CH dmx address,(001—512) B,C to set the value
2	A001	5CH dmx address,(001—512) B,C to set the value
3	CC 00	Color Jump(01—99) B,C to set the value
4	CP 00	Color Fade,(01—99) B,C to set the value
5	dE 00	Color Pulse,(01—99) B,C to set the value
6	bEbE	Sound (Color Jump)
7	R255	Red,(000—255) B,C to set the value
8	G255	Green,(000—255) B,C to set the value
9	B255	Blue,(000—255) B,C to set the value
10	W255	White,(000—255) B,C to set the value
11	Y255	Amber,(000—255) B,C to set the value

3.DMX512 9CH (d001)

CH	Function	Description
----	----------	-------------

1	Master dimmer	R,G,B,W,A master dimmer, 0~100%
2	Strobe	R,G,B,W,A master strobe, slow-fast
3	Macro	0—50: DMX ; 51 — 100:Color Jump; 101—150:Color fade; 151—200:Color Pulse; 201—255:Sound
4	Macro speed	Slow-fast
5	R	Red dimmer,0~100%
6	G	Green dimmer,0~100%
7	B	Blue dimmer,0~100%
8	W	White dimmer,0~100%
9	A	Amber dimmer,0~100%

4.DMX512 5CH (A001)

CH	Function	Description
1	R	Red dimmer,0~100%
2	G	Green dimmer,0~100%
3	B	Blue dimmer,0~100%
4	W	White dimmer,0~100%
5	A	Amber dimmer,0~100%

5.Feature:

Easy operate, flicker free.

6.Parameter:

Voltage: AC100V-240V, 50/60Hz

Light Source: 18PCS 15W rgbwa 5in1 LEDs

Beam Angle: 25degree

Lens: high transparent PMMA second optical lens

Control Mode: Auto / Master-Slave / DMX512 / Sound active

DMX Channels: 5/9CH

Effect: color choose, color jump, color fade,dimmer, strobe

Dimmer: 16bit 0-100% linear dimmer

Strobe: 1-20 flashes/second

IP Rating:IP44

Environment Temp: -20°C-40°C

Size: 21*28*25cm

N.W:4.5kg

