

F 10XR

10-CHANNEL MIXING CONSOLE WITH MULTI-FX & RECORDING

DESCRIPTION

The F 10XR features 4 mic preamp inputs, 2 mono line inputs, 4 stereo line inputs plus multi-FX and recording via USB port, with balanced main output (stereo XLR + TRS) and 2 single control compressors. The mono channels are provided with 3-band EQ and stereo channels with 2-band. The mixer features 16 PRO DSP internal FX presets and an aux send (post fader) with rotary knob control.



FEATURES

- 4 Mic preamp inputs, 2 mono line inputs
- 4 stereo line inputs
- PRO DSP FX onboard with 16 presets
- Stereo recording and playback via USB port
- 2 single control compressors
- Balanced main output +28 dB (Stereo XLR + TRS)
- 1 aux/FX (post)
- Sturdy metal chassis
- External universal power supply
- Designed and engineered in Italy

TECHNICAL SPECIFICATIONS

Electronic specifications

| | |
|----------------------------|----------------|
| Frequency Response: | 20 Hz ÷ 20 kHz |
| THD+N, 20dB gain, 0dBu out | <0,02 |

Inputs

| | |
|------------------------------------|----------------|
| Mic: | 4 |
| Gain Range: | 0 dB ÷ -50 dB |
| Mic Inputs Impedance: | 14 kohm |
| Low Cut: | 80 Hz |
| Phantom Power +48V: | Yes |
| Mono Line: | 2 |
| Gain Selection: | 20 dB ÷ -30 dB |
| Line Input Impedance: | 21 kohm |
| Stereo Line: | 4 |
| Gain Selection: | 20 dB ÷ -30 dB |
| Stereo Line Input Impedance (kOhm) | 15 kohm |

Outputs

| | |
|---------------|-----|
| Main MIX: | 1 |
| Control Room: | Yes |
| FX Send: | 1 |
| AUX Output: | 1 |
| Phones: | 1 |

Outputs specifications

| | |
|-----------------------------|---------|
| Main Out Level: | 28 dBu |
| Aux Out Level: | 28 dBu |
| Phones Out impedance (ohm): | 150 ohm |

Compressors

| | |
|------------------|---|
| RCF Compressors: | n° 2 Single Control compressors on channels 1&2 |
|------------------|---|

EQ

| | |
|--------------------|---|
| Input Channels EQ: | 2 Shelving / 1 Generic |
| Description: | High: +/-15 dB @ 10 kHz Shelving Mid: +/-15 dB @ 1,250 kHz Bell Low: +/-15 dB @ 100 Hz Shelving |

Auxiliary sends

| | |
|----------|---|
| FX POST: | 1 |
|----------|---|

Internal Effects

| | |
|---------------|---|
| Send Effects: | 1 |
|---------------|---|







| | | |
|----------------------------------|--------------------------|-----------------------|
| USB audio | Type: | B |
| | Play trk: | 2 |
| | Rec trk: | 2 |
| | Supported Sample Rate: | 44.1, 48.0 |
| <hr/> | | |
| Other features | Footswitch: | Yes |
| <hr/> | | |
| Electrical specifications | Power supply: | External |
| | Voltage requirements: | 100 V - 240 V |
| | Power consumption (MAX): | 18 W |
| <hr/> | | |
| Standard compliance | CE marking: | Yes |
| <hr/> | | |
| Physical specifications | Cabinet/Case Material: | Metal |
| | Color: | Black |
| <hr/> | | |
| Size | Height: | 82 mm / 3.23 inches |
| | Width: | 294 mm / 11.57 inches |
| | Depth: | 275 mm / 10.83 inches |
| | Weight: | 2.8 kg / 6.17 lbs |
| <hr/> | | |
| Shipping informations | Package Height: | 130 mm / 5.12 inches |
| | Package Width: | 400 mm / 15.75 inches |
| | Package Depth: | 345 mm / 13.58 inches |
| | Package Weight: | 3.8 kg / 8.38 lbs |

PART NUMBER

- **17140089**

F 10XR

EAN 8024530016142

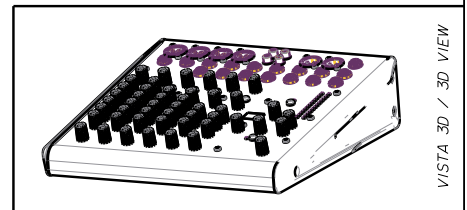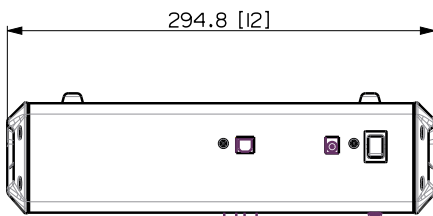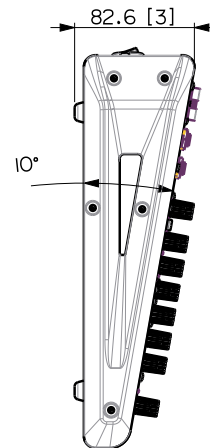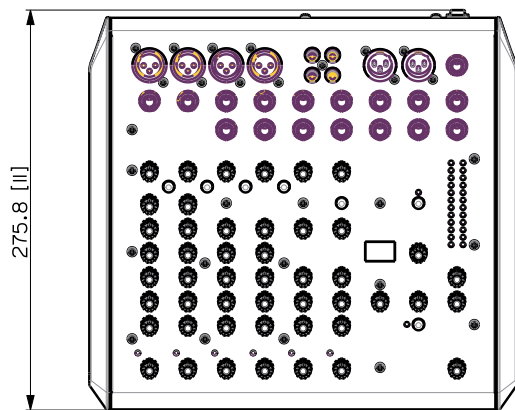

MIXER F IOXR 90-240 V

REV.
A